

Panasonic

900 MHz MULTI-LINE WIRELESS TELEPHONE

KX-T7885 KX-T7885-W

900MHz Multi-Line Wireless Telephone

- ▶ 12 CO Line Capability
- ▶ Long-Life Nickel Metal Hydride Battery
- ▶ Caller ID Compatible*
- ▶ 3-Line Multi-Function LCD Readout
- ▶ Headset Jack & Belt Clip
- ▶ Message Waiting Indicator
- ▶ Vibrating or Ringer Signal



900MHz
WIRELESS

900 MHz Multi-Line Wireless Telephone

Now there's no need to wait at your desk for those important phone calls! The KX-T7885 proprietary multi-line wireless phone gives you the mobility and clarity of a 900 MHz operation, plus the functionality of a powerful system phone. Just clip the compact handset to your belt or purse and you're ready to take or make calls from anywhere within range. An essential communications tool for both busy offices and


homes, the KX-T7885 can accommodate as many as 12 CO lines. It also possesses a host of sophisticated features that you can control with the handset's flexible keys and function buttons. A 3-line LCD readout helps make it easy to use and a headset jack lets you connect an optional hands-free headset. The KX-T7885 is now available in two color choices, black or white.

900 MHz Wireless Operation

Provides clear sound, enhanced range and reduced interference from radios, computer monitors and fluorescent lighting compared to ordinary wireless phones.

Flexible Keys for up to 12 CO Lines

The portable handset features 4 flexible keys with 3 positions each. In PBX mode, these keys can be programmed to access a total of up to 12 CO (central office) lines, system features or a combination of both. In SLT mode, they can be used to store 12 telephone numbers for convenient one-touch dialing.

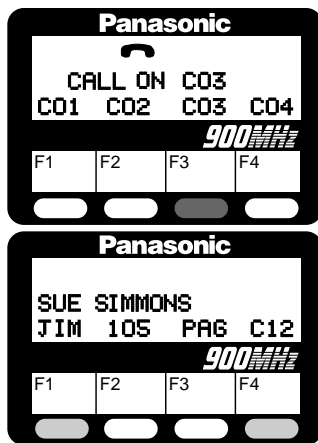

Caller ID Compatible*

When integrated with a Panasonic Digital Super Hybrid or Super Hybrid phone system, the KX-T7885 can display an incoming caller's phone number or name for effective call screening.

6 Ringer Modes

The KX-T7885 features 6 different ringer modes. There are standard high, medium and low rings, as well as a step ringer that gradually increases in volume. The vibrator ring is perfect for use in situations when an audible ring would not be desirable. Additionally, the ringer can be set to the OFF position.

3-Line Multi-Function LCD Readout

Provides helpful information like Caller ID data*, call information, line status, and flexible key number or name. It also features indicators for programming mode, intercom mode, message waiting status and more.

Hands-Free Headset Jack

Now there's no need to interrupt your workflow just to answer the phone. You can connect an optional hands-free headset to the KX-T7885 for automatic answering of intercom calls, plus access to features like BGM and Paging.

Combination Buttons

By pressing the FUNC key and one of the assigned numerical keys, you can access certain features including Pause, Conference, Call Forward, DND and Flash.

Wall-Mountable Base Antenna

You can keep the handset cradle on your desk and position the base antenna in a location that is central to your workspace, enabling you to maximize your range within that space.

Handset Cradle/Spare Battery Charger**

Allows you to charge a spare battery*** while using another in the handset.

12 One-Touch and 10 Auto Dial Numbers****

Allows you to store up to 12 phone numbers for one-touch dialing. You can also store 10 additional numbers for convenient speed dialing. Each phone number can be up to 20 digits in length, enabling you to include access codes.

High Capacity, Quick Charging Ni-MH Battery

Handy Belt Clip

Message Waiting Indicator

30-Channel Auto Scanning

Handset Locator

Sound Charger™ Noise Reduction Technology

FWD, DND, Redial, Transfer and Hold Keys

Available in Black or White

KX-T7885 Specifications

BASE UNIT:

Duplex Frequency Bands:	902.125/927.600 MHz
Specific Channel Numbers:	30
Adjacent Channel Rejection:	60 dB
Sensitivity:	1.0µV for 15 dB
Dial Mode:	Tone (DTMF)/Pulse
ID Code:	20-bit
Power Source:	AC Adaptor
Dimensions (HxWxD):	1-5/8" x 4-3/4" x 6-13/16"
Weight:	0.70 lb. (315 g)

CHARGING UNIT:

Power Source:	AC Adaptor
Dimensions (HxWxD):	4-5/8" X 3-3/8" X 2-5/16"
Weight:	0.33 lb. (150 g)

*PBX mode only. Requires the installation of an optional Caller ID Card in the host PBX system. Also requires a subscription to Caller ID service offered by certain telephone companies for a fee. ** Spare battery not included. *** KX-A276 and KX-A276-W spare battery can be purchased separately. **** SLT Mode only.

PORTABLE HANDSET:

Duplex Frequency Bands:	902.125/927.600 MHz
Specific Channel Numbers:	30
Adjacent Channel Rejection:	60 dB
Sensitivity:	1.0µV for 15 dB
Speed Dial Memory Capacity:	12 one-touch (F1-F12), 20 digits each**** 10 auto dial (feature code access), 20 digits each****
Redial:	Up to 30 digits
Pause:	3.5 seconds
Flash:	700 ms
ID Code:	20-bit
Power Source:	Ni-MH Battery
Charging Time:	1.5 hours
Talk Time:	up to 4 hours
Standby Time:	3 days
Dimensions (HxWxD):	7-9/16" X 1-15/16" X 1-3/16"
Weight:	0.42 lb. (191 g)

Panasonic Consumer Electronics Company

Division of Matsushita Electric Corporation of America

Executive Offices: One Panasonic Way, Secaucus, NJ 07094 (201) 348-7000

Panasonic Company East

6749 Baymeadow Drive, Glen Burnie, MD 21060 (410) 761-1900

Northeast Region: 50 Meadowlands Parkway,

Secaucus, NJ 07094 (201) 348-7000

Panasonic Company Central

1707 N. Randall Rd., Elgin, IL 60123 (847) 468-4308

Panasonic Company West

6550 Katella Ave., Cypress, CA 90630 (714) 373-7200

Hawaii Region: 99-859 Iwaiwa Street,

Aiea, HI 96701 (808) 488-7779

Panasonic Sales Company

Division of Matsushita Electric of Puerto Rico, Inc.

San Gabriel Industrial Park, Ave. 65 de Infantería, Km. 9.5,

Carolina, PR 00984 (787) 750-4300

Panasonic
just slightly ahead of our time®

Panasonic Customer Call Center

9 am - 9 pm (EST) 7 days a week

1-800-211-PANA

www.panasonic.com/csd

Design and specifications subject to change without notice.